



LineLed Flex

All flexible




Private office, USA / Visualization: Studio Spacer



Hotel B / Visualisation: Studio Spacer



Private residence / Visualisation: Studio Spacer

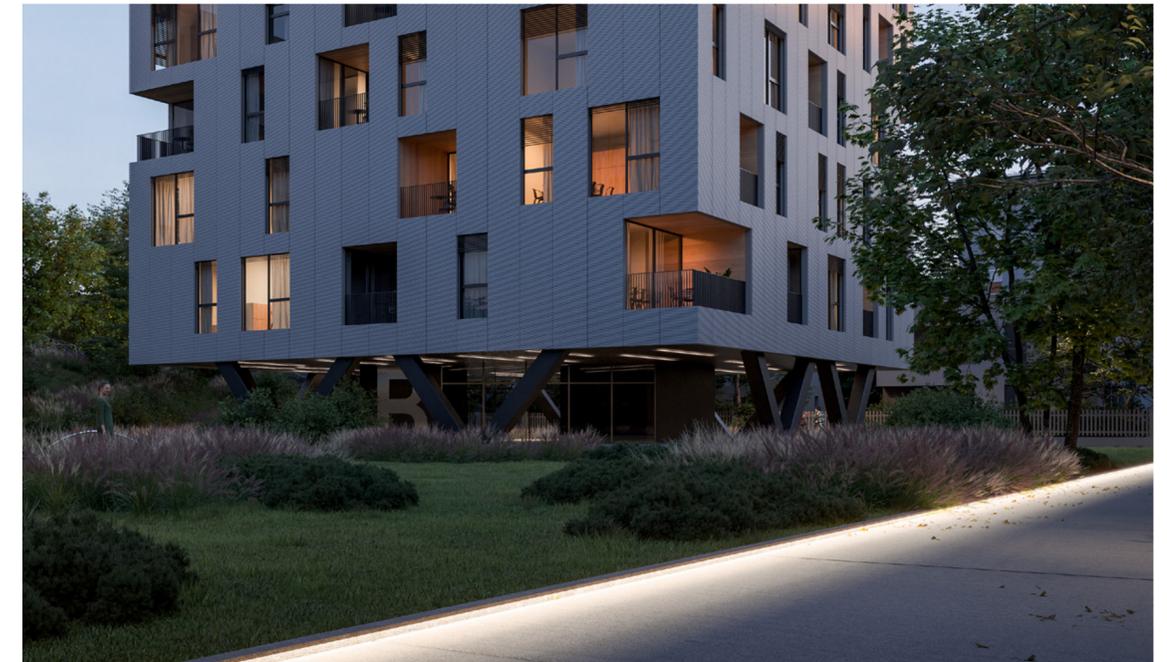

Vila Park, Slovenia / Architecture & Visualisation: Studio Spacer



Private residence, Slovenia / Interior design & visualization: Studio Spacer



Private residence / Visualisation: Studio Spacer

Outdoor freak no matter the weather

LineLed Flex can follow all the lines and forms of architecture outdoor and indoor. It is a flexible silicone strip with a high IP rating, intended for creating decorative lighting scenes, sign lighting or simply to highlight all the forms, since it is easily bent in all directions. It emits uniform light with no shadows and is simple to install. And if you love playful coloured light, an RGB option is available.



Family members

LUMINAIRE LUMINOUS FLUX

240 - 670 lm/m

LED COLOUR

923, 930, 940

DRIVER



DALI, FO

IP PROTECTION


IP65, IP67

WIDTH

4 mm, 12 mm, 13 mm

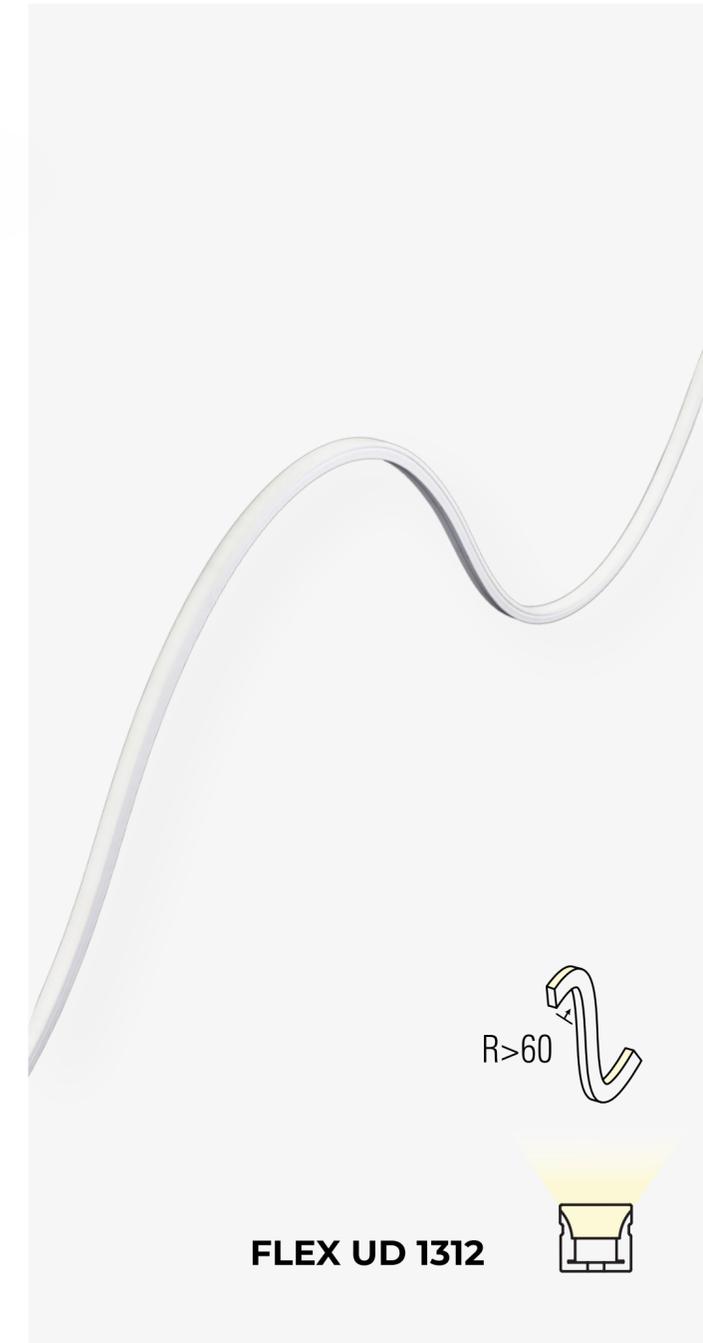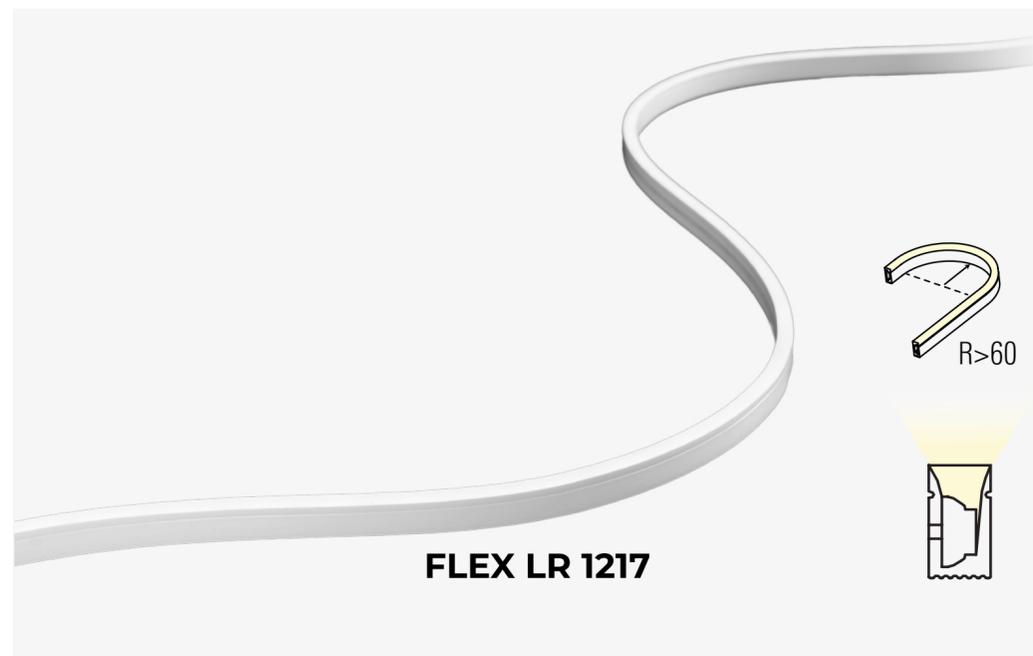

Overview of features

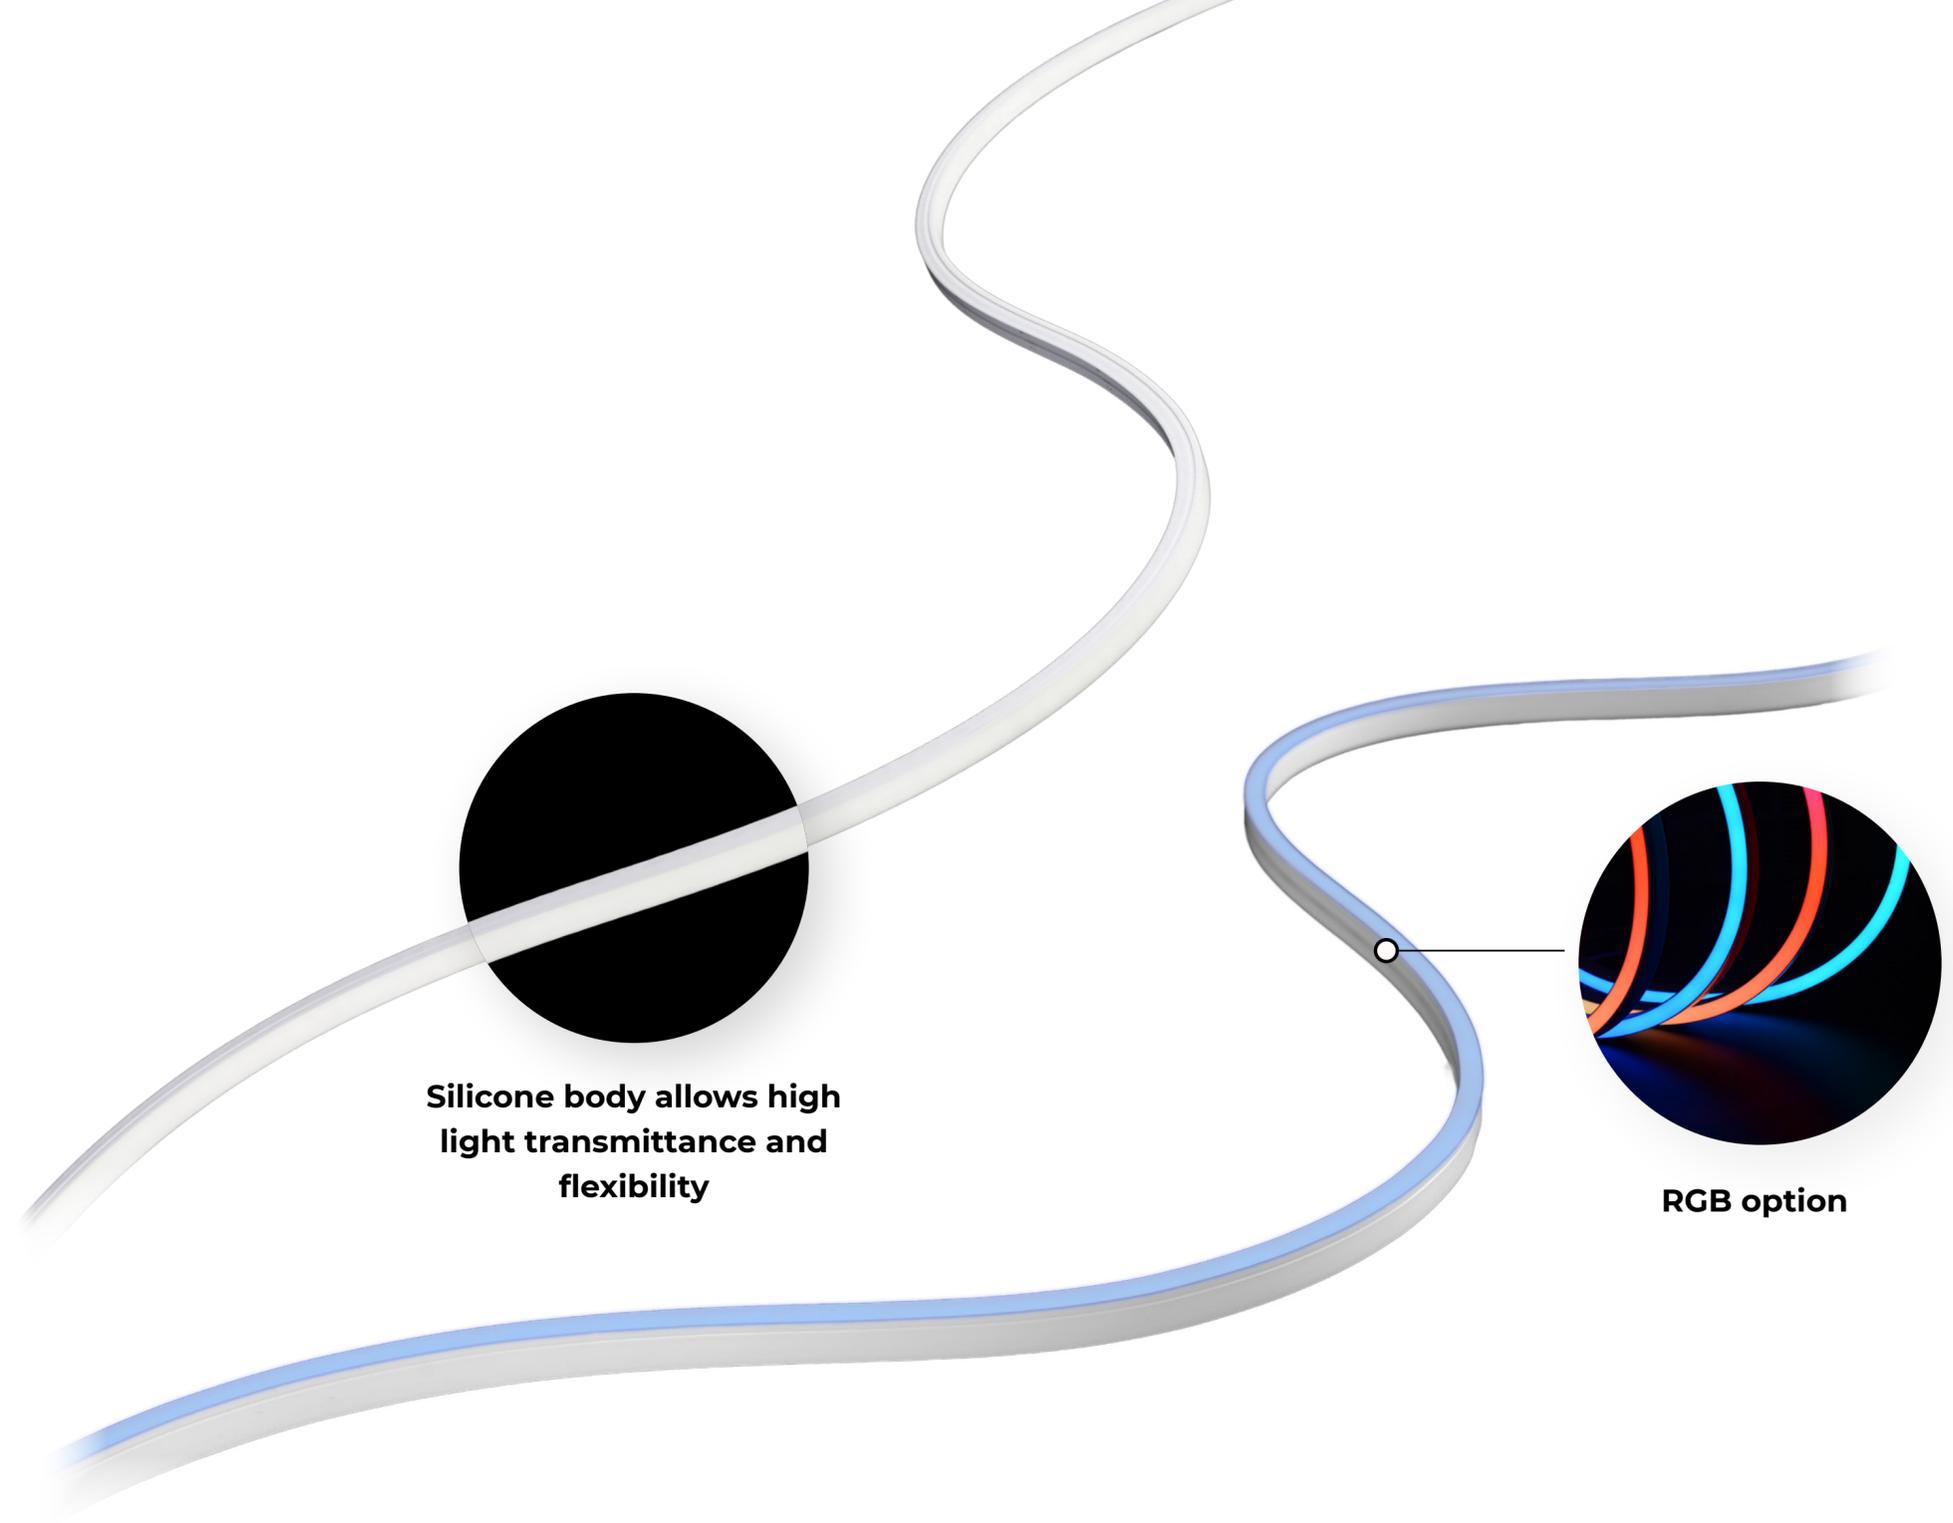

Silicone body allows high light transmittance and flexibility


RGB option

* intra lighting

LR 1217 & UD 1312

Weather-resistant

LineLed Flex is primarily made for the outdoors. With IP67, it is resistant to harsh environmental and weather conditions such as rain, sun and wind. It's flexible to follow straight and flexible shapes in the environment.

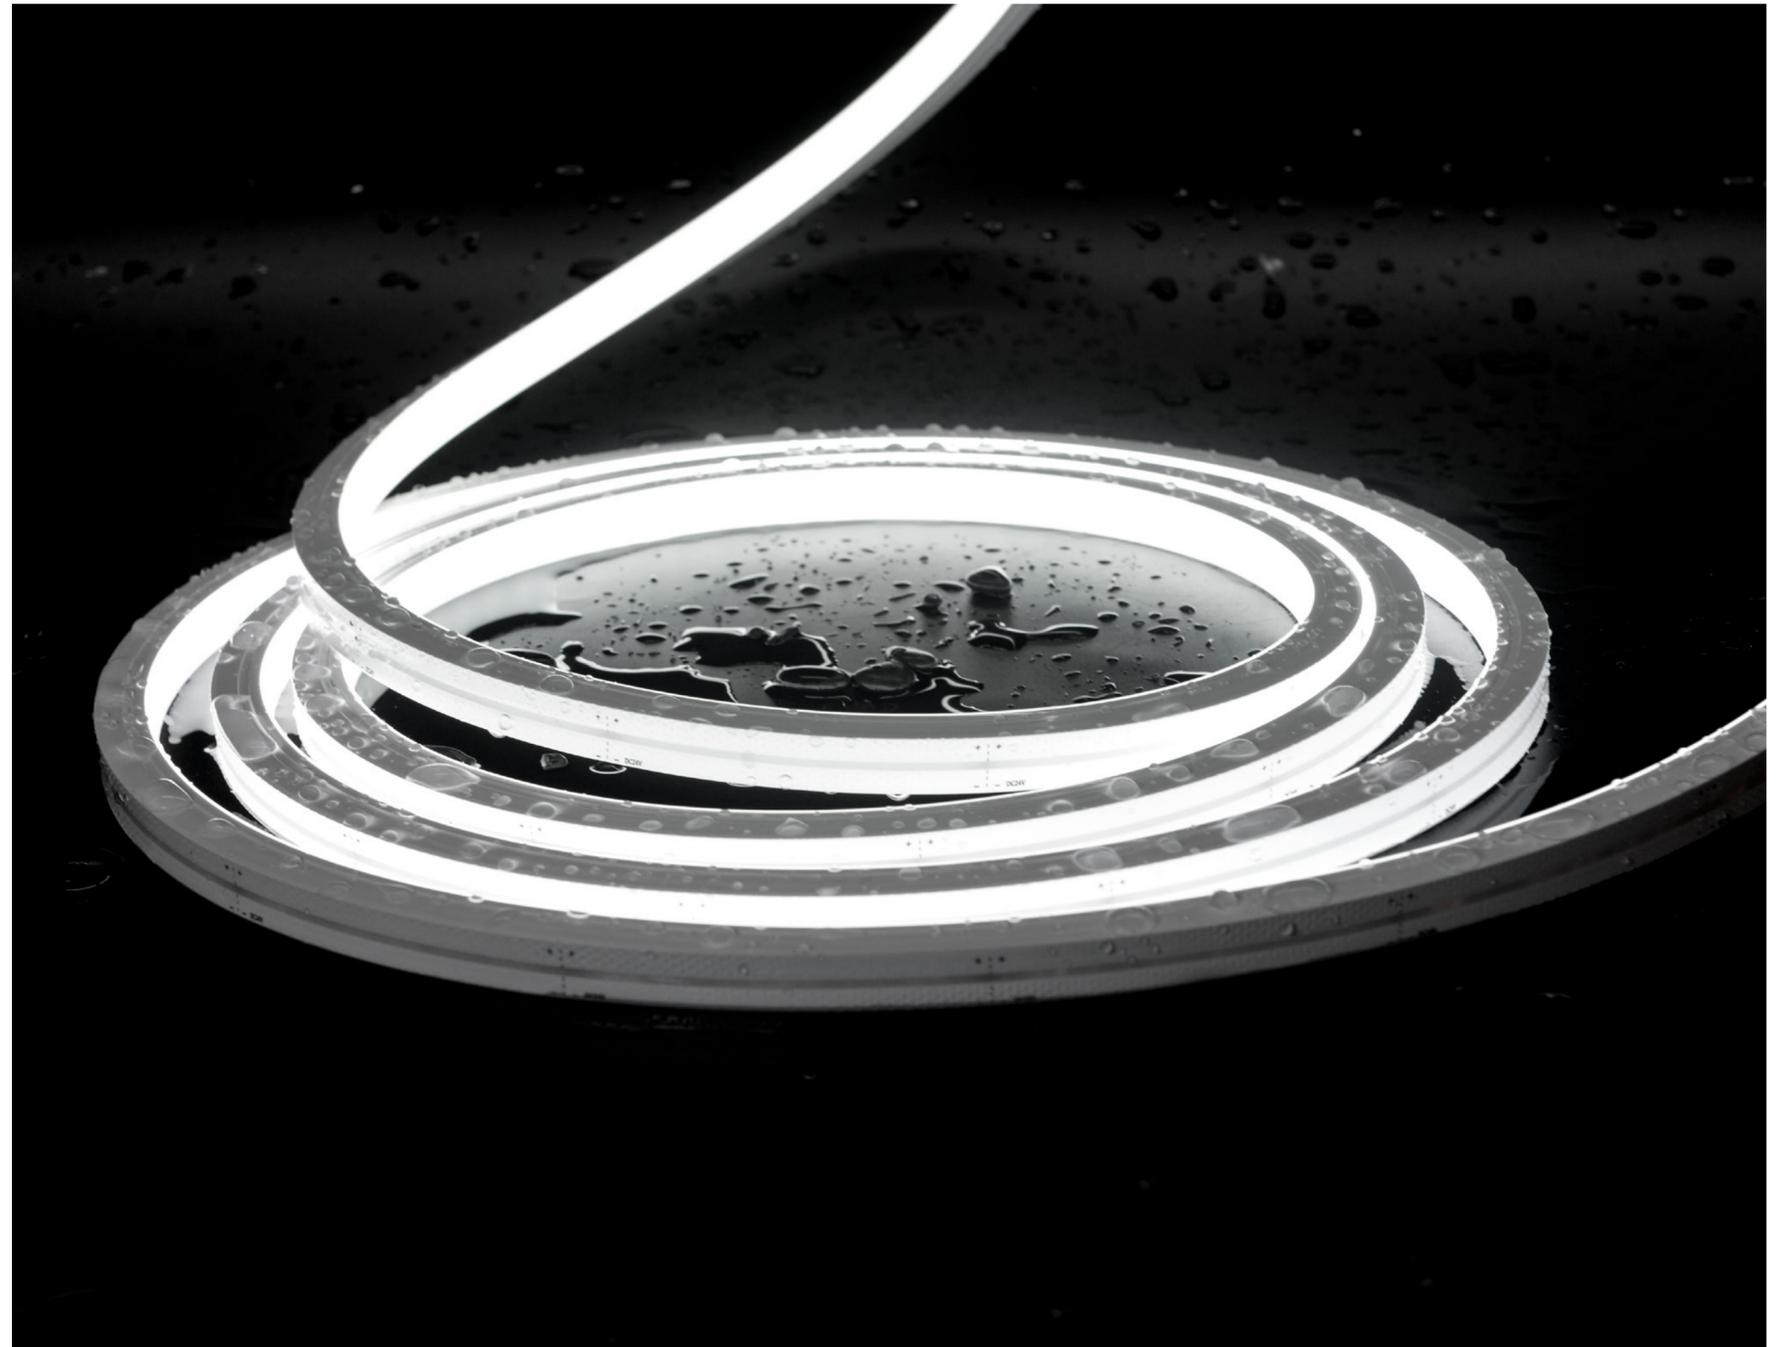

LR 0410


Create thin, only 4 mm light drawings

One of the thinnest light lines allows you to underline furniture and create stunning light effects.




Simple installation

On-site cutting of the product is possible. A wide range of accessories for different ways of installation is available.

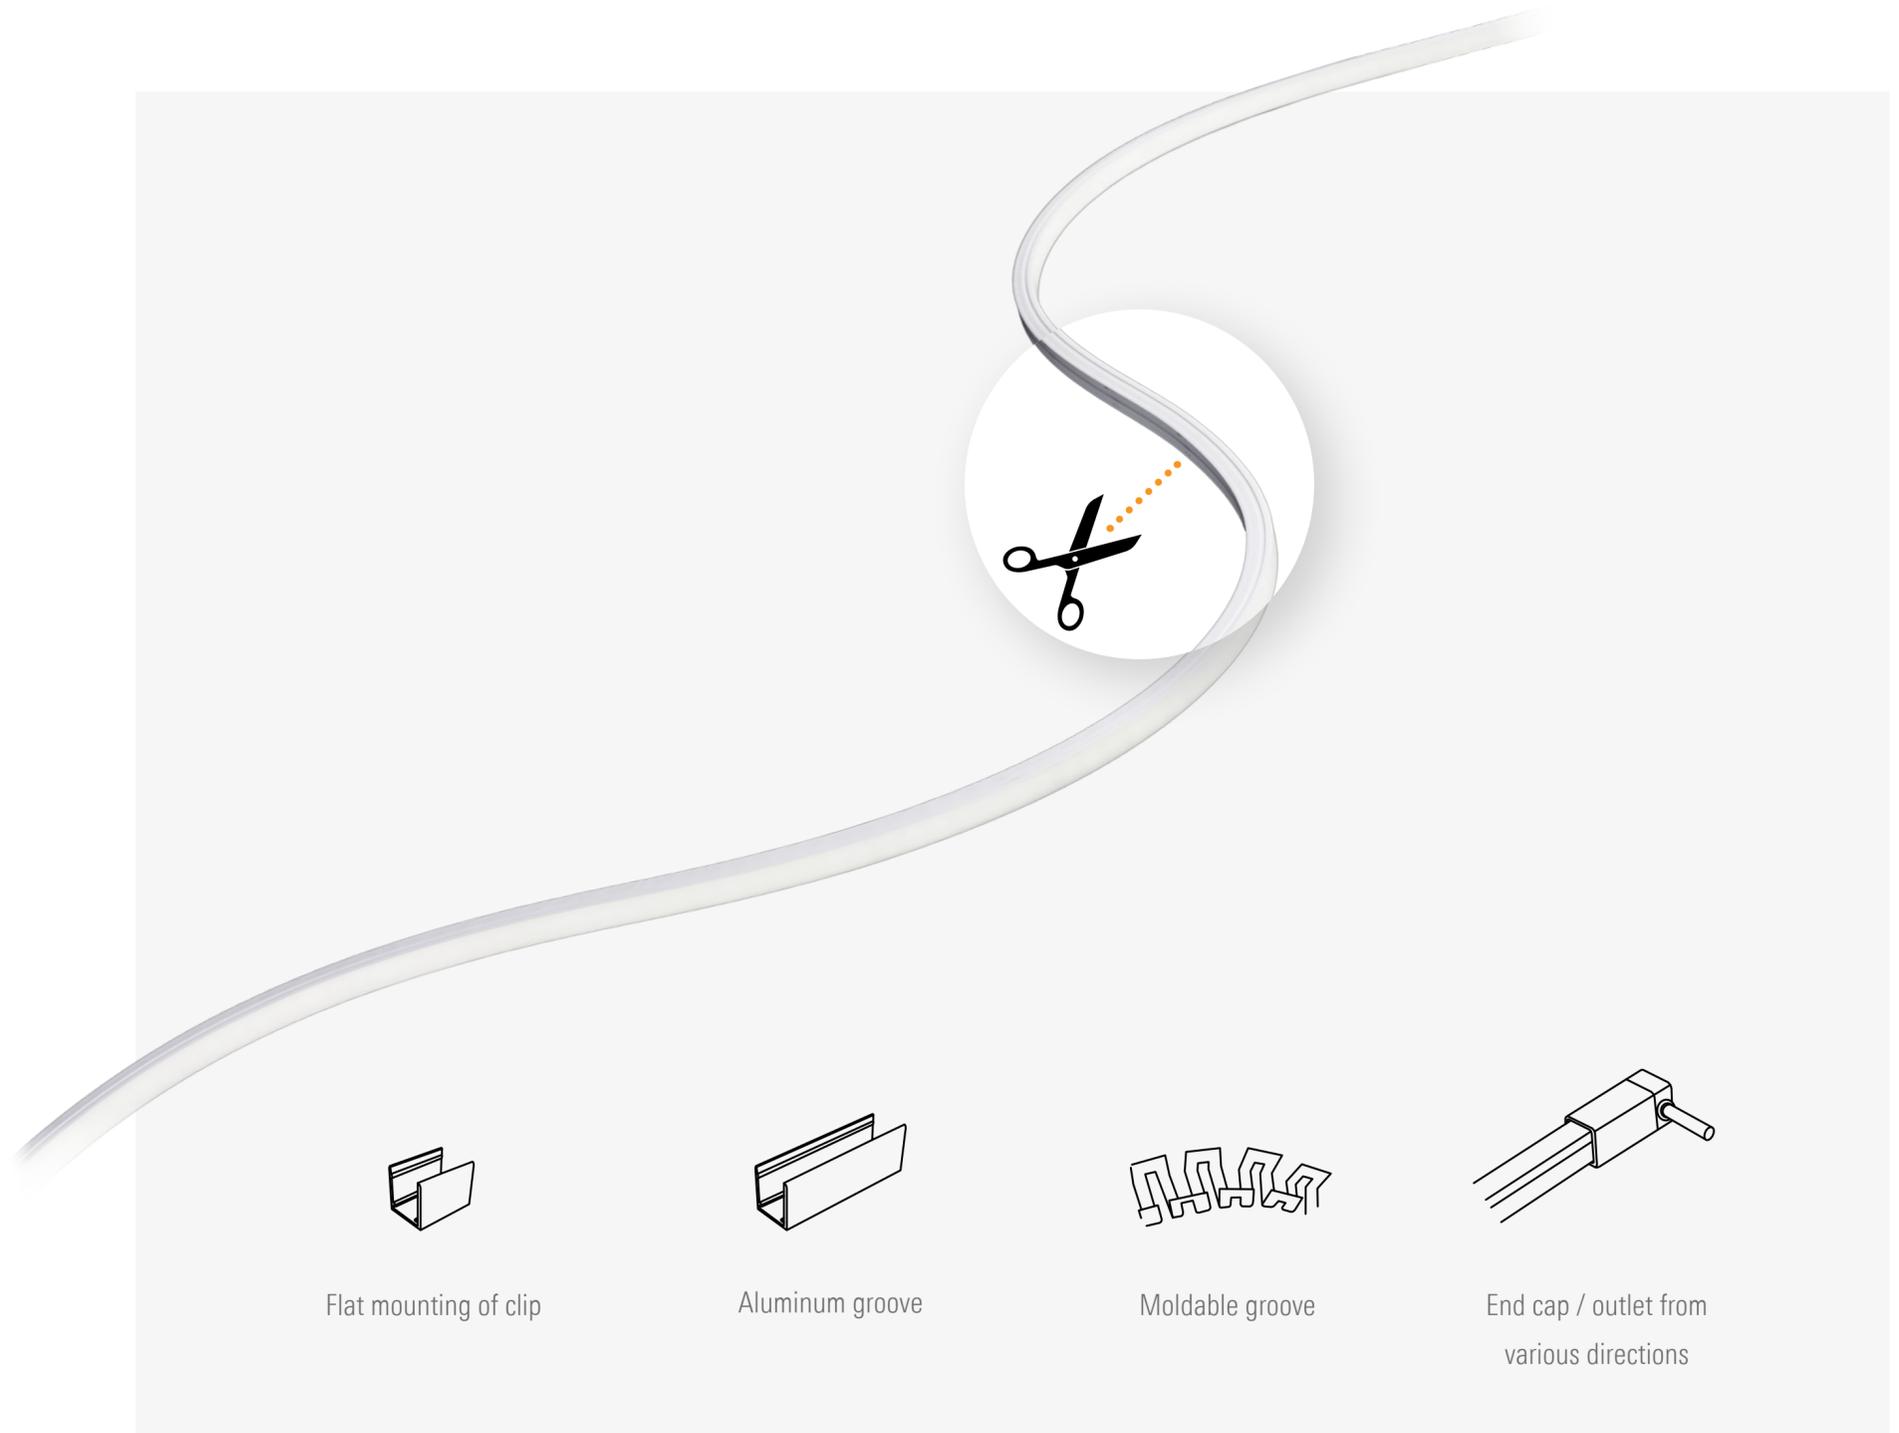



All-weather
resistant

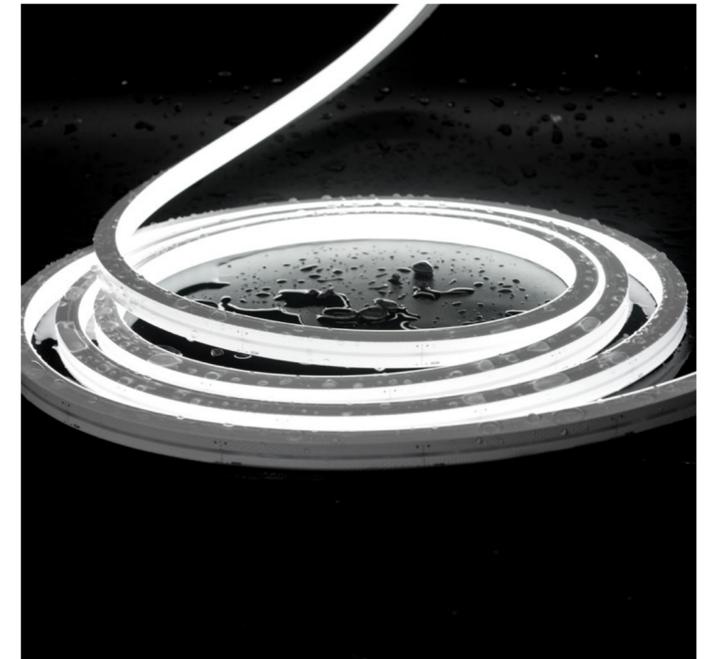


Totally flexible in
all directions



FLEX LR 0410

Curved left / right, 4mm

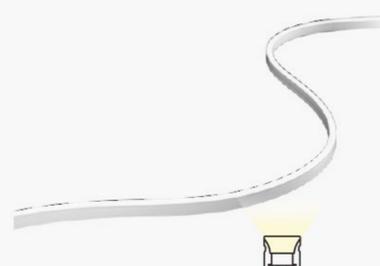

FLEX LR 1217




Curved left / right, 12 mm



FLEX UD 1312

Curved up / down, 13 mm

Luminaire luminous flux/m	240 lm/m	520 lm/m	670 lm/m
Led colour	923, 930, 940	830, 840, RGBW	830, 840, RGBW
Driver	DALI, FO	DALI, FO	DALI, FO
Driver position	Remote	Remote	Remote
IP protection	IP65 (Indoor use only)	IP67	IP67
Material	Silicone	Silicone	Silicone
Flexibility	Horizontal	Horizontal	Vertical
Colour	1	1	1
Dimensions	L (mm): 5.000	L (mm): 10.000 / 5.000 (RGBW)	L (mm): 10.000 / 5.000 (RGBW)



Accessories




Flat mounting of clip



Aluminum groove



Moldable groove



End cap / outlet from various directions